

IK-93T HAWK

Mechanized Manual Guiding Cutting Machine

Features and Benefits

■ Pistol shape control grip

Ergonomically designed grip provides comfortable handling of the machine.

■ Centralized control

All functions including cutting oxygen, clutch operation and speed adjustment are located at the grip for ease of operation by one hand.

■ Multiple use oxy-fuel cutting machine

All of straight line, hand guide, circle and plate edge bevel cutting can be done by selecting a suitable option.

■ Compact and lightweight

The machine weighs only 7.5 kg. Together with the slim body and handling grip, the machine can be carried from plate to plate easily.


■ Bevel collar

Torch angle can be set accurately using graduated bevel collar.


High quality multi purpose cutting

Machine handle with centralized controls

IK-93T Hawk is designed with the emphasis on ease of operation with one hand. Its centralized control features a convenient speed adjustment dial, travel switch, clutch and cutting oxygen operation lever. Single wheel drive system provides maximum manoeuvrability, making it easy to change machine travel direction during cutting. The narrow and light-weight IK-93 rail is easily carried and placed. The angle indicator on the torch holder ensures accurate bevel cuts. Together with optional accessories, a wide variety of plate cutting can be achieved with IK-93T Hawk.

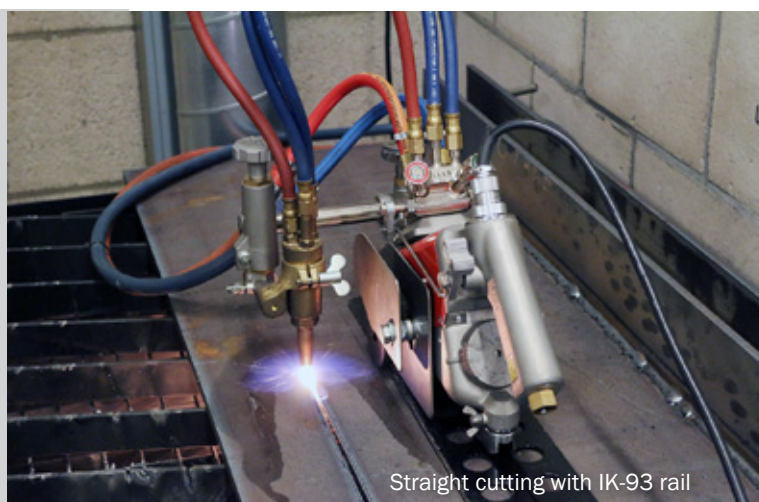

Straight cutting with IK-93 rail

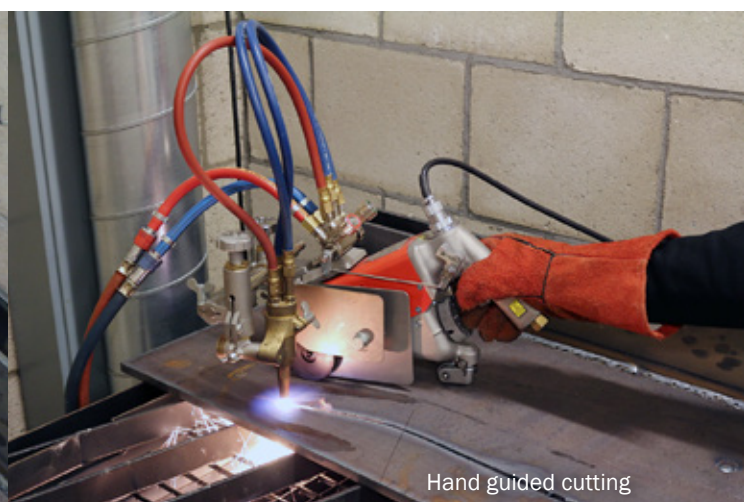

Hand guided cutting

The IK-93T Hawk is a portable gas cutting machine developed primarily for the purpose of high quality straight line, hand guided cutting. In addition to featuring high cutting quality, it also demonstrates unprecedented smooth operation and mobility.

Optional accessories

Accessory	Stock #	Description
Extension rail 1800 mm for IK-93	90018	
Circle cutting attachment for IK-93	33353	Cutting diameter: Ø 100 - 1100 mm
Plate edge guide roller	T60038959	For bevel cuts along plate edge. Counter weight recommended.
Transformer AC230V - 42V	222.002.207	For 42V models

Specification

	IK-93T Hawk
Cutting thickness	5 - 100 mm
Cutting speed	100 - 1000 mm/min
Bevel angle	0 ~ 45°
Clutch	Trigger type mechanical clutch
Speed control	Control IC
Heat shield	Doubled shield for thermal protection
Input power	AC 220V / AC 42V
Dimension (excl. torch unit)	L380 x W130 x H210 mm
Weight	7.5 kg

Types

Model	Stock #
IK-93T Hawk B - type 42V	TBPJ64009-20
IK-93T Hawk B - type 220V	TBPJ64009-16

Scope of delivery

Machine body with torch set (including slide bar)
Cutting nozzles (102HC or 106HC, size #0, 1, 2)
Power cable
Standard tool set
Operation manual



EMEA Sales and Service Offices

FRANCE

KOIKE France S.A.R.L.
ZAC de la Vallée de L'aunelle
RN Cellules C1 à C4
59144 Wargnies-Le-Grand
T: +33 327304343

GERMANY

KOIKE EUROPE B.V. Germany Branch Office
Im Löchel 2
35423 Lich-Eberstadt
T: +49 6004916930

ITALY

KOIKE ITALIA Srl
Via Papa Giovanni XXIII, n 45
20053 - Rodano (Milano)
T: +39 0295328717

UAE

KOIKE MIDDLE EAST FZE
SAIF Zone Sharjah - UAE
P.O. Box 122978
T: +971 561177615

THE NETHERLANDS

KOIKE EUROPE B.V.
Grote Tocht 19
1507 CG Zaandam

T: +31 (0)75 612 72 27
F: +31 (0)75 612 34 61

info@koike-europe.com
www.koike-europe.com